



# WASTE HEAT RECOVERY

Clean Energy and Efficiency Solutions  
for the Global Energy Market





## Solutions for Boiler Efficiency and Steam Raising Plant

Clyde Bergemann Australia PTY Limited (CBA) provides to the boiler and steam raising industry, locally designed and manufactured fuel Economisers and specialised heat exchange products for power generation and large industrial steam raising plants.

CBA opened its doors for business in 1962, with its primary product being boiler Economisers. Through the years, our knowledge and experience in many other processes has allowed us to develop other waste heat recovery products. Today CBA is known as an innovator of waste heat recovery and clean energy solutions to power generators and industry across Australia and abroad.

Our product range includes:

- Economisers
- Waste heat recovery systems
- Air preheaters
- Recuperators
- Longwall cable handling equipment

In conjunction with the Clyde Bergemann Power Group we offer an enhanced product range which includes:

- On-load 'intelligent' boiler cleaning
- Materials handling and
- Air pollution control solutions

CBA is involved in the design and manufacture of many types of waste heat recovery equipment. Our expertise lies in waste gas-to-liquid heat exchangers and waste gas-to-gas heat exchangers which absorb heat from the exhaust of reciprocating engines, gas turbines, furnaces, incinerators, boilers and other combustion equipment. The energy is transferred to process fluids such as water, steam, oil or air. Our equipment is built to AS, BS and ASME standards for both fired and non-fired vessels.

CBA is a fully owned subsidiary of the Clyde Bergemann Power Group. Our clean energy solutions are based on extensive experience with the original design of our Steel 'H'® extended surface Economiser further developed for applications in heavily fouled gas streams such as those fired with coal, PF and biomass fuels. Continued development of Steel Double 'H'® finned tube in varied symmetries has provided cost effective waste heat recovery for clean natural gas-fired cogeneration and fired steam raising plant.

In addition, we offer complete solutions for effective on-line cleaning of Steel 'H'®/Double 'H'® heating surfaces with Clyde Bergemann on-load cleaning technology.



## Energy Recovery Solutions for Global Power and Industrial Steam Raising Plants

### Waste Heat Recovery Systems

CBA offer a variety of heat recovery solutions for modern plants. From hot water to steam to fluid heating our company caters for many industrial applications requiring waste heat in some form. Our waste heat units are designed with integral bypass reducing the footprint required for heat recovery and consist of proven robust steel 'H'® design heating surface. Typical markets include marine waste heat including FPSO/FLNG vessels and land based waste heat. Our capacities range from 0.5 MW of heat recovered up to 50 MW of heat recovered. Additional capabilities include provision for supplementary firing and extra heating surface.

### Advantages:

- Robust heating surface
- Units delivered in largest transportable pieces
- Increases thermal efficiency to the process
- Optimum supplementary firing to increase overall heat recovery potential
- Ideal for retrofit applications
- Custom made designs available
- Turnkey experience in delivery
- Low maintenance costs

Reference List (extract)		
Country	Plant	Year
Guayana	LIZA DESTINY - FPSO EPCI (CAPEX) - Guayana	2017
Brazil	Cidade De Campos Dos Goytacazes MV29 FPSO - Brazil	2016
USA	Shell Stones FPSO - Gulf of Mexico	2013
Ghana	T.E.N. FPSO - Tullow Oil Ghana	2013
Australia	Wheatstone Offshore Platform	2012
New Zealand	Bay Milk	1996



## Simplifying the Installation's Footprint

### Integral Bypass Solutions

An integral bypass solution can be applied to the waste heat units in order to simplify the footprint of the installation. This saves additional ductwork and reduces installation timing down to fewer lifts.


The system consists of louvre type dampers that have been operating on CBA installations over the last two decades. The damper operation can be either pneumatic actuated or hydraulic operated depending on individual customer requirements.

The gas flow over the heat convection bank is modulated depending on the outlet fluid temperature. CBA integral bypass dampers fail safe in the 'bypass' mode in the event of turbine/compressor/engine failure.

### Advantages:

- Fit anywhere in ductwork
- Compact, minimal external clearance required
- Drive and linkage readily accessible
- Good flow modulation capabilities
- Fast opening / closing possible
- Zero leakage to atmosphere possible
- Fail safe in bypass mode
- Removabl Heat Exchanger Bundle
- Proven over two decades of operating experience

Integral bypass damper located on the inlet to the WHRU

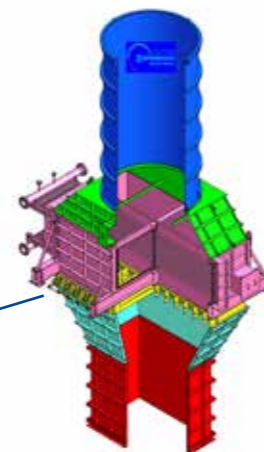

## Purpose Built Machinery for High Quality Design

### Specialised Manufacturing

Our manufacturing facility in Wetherill Park, Sydney, Australia, is configured to ensure efficient processes throughout and contains purpose built machinery designed to produce the highest quality output.

- Throughout the manufacturing process modern welding equipment is used to meet regulatory standards.
- Purpose built resistance welding finning machines
- CBA has over five decades of experience in manufacturing heat recovery solutions
- Specialist boiler tube bending machines form part of the process of ensuring our heat recovery solution confirms to code requirements
- Steel 'H'® and Double 'H'® finned tubes assembled into individual elements giving greater flexibility to expand and contract in the operation and allowing for easy removal in the event of maintenance if required.
- Proven designs cater for all relevant code requirements

### Quality assurance

We are quality assured to ISO9001 and ASME 'S' Stamp. Regular audits from international assessment organisations ensure we are producing high quality output at every level of production.

Our products are also designed and manufactured to the following Pressure Vessel codes and rules:

- AS1228
- ASME Codes Section I and VIII Div. 1
- ASME 'S' Stamp (pending)
- Lloyds Register of Shipping
- BS.1113 / BS.5500 / BS.2690



## International Installed Base

## Proven Technology Around the World

BRAZIL - Tupi MV22 FPSO	
Customer	MODEC International
Water heaters	3 x 231 tph
LM2500	3-off
Heat recovered	17.7 MW
Hot Water	145°C

BRAZIL - Cidadesde São Mateus FPSO	
Customer	Prosafe Production Services
Water heaters	3 x 210 tph
Solar titan 130	3-off
Heat recovered	13.56 MW
Hot Water	135°C

AUSTRALIA - BP 'Bulwer Island' Refinery	
Customer	ABB Alstom
Steam output	92,000 kg/h
Steam temp	370°C
Steam pressure	34 Bar a
Support fuel	Natural gas
AGT Cyclones	2-off

NEW ZEALAND - Kapuni Energy Plant	
Customer	Kapuni Energy
Steam output	2 x 45,000 kg/h
Steam temp	300°C
Steam pressure	34 Bar a
Support fuel	Natural gas
Solar Mars 100	2-off

AUSTRALIA (North West Shelf) - Wandoo B Platform		
Customer	Solar Turbines USA	
Water heaters	2 x 200 tph	1 x 195 tph
Heat recovered	7.1 MW	76.8 MW
Hot water	120°C	120°C
Solar Taurus 60	2-off	1-off

AUSTRALIA - BHP Whyallia Steel works	
Customer	GEC Alstom
Projects	2 x gas turbine exhausts into 1 x HRSG
EGT Typhoon MR GT	2-off
WHR	1 x 16,000 kg/h steam
Superheat	454°C @ 4.2 mpa

Clyde Bergemann is represented in over 40 countries worldwide.



**Clyde Bergemann Australia**

Pty Limited  
33-35 Redfern Street  
Wetherill Park NSW 2164  
Australia

Tel.: +61 2 9757 7400  
Fax: +61 2 9757 7499

Internet: [www.cbpg.com](http://www.cbpg.com)  
eMail: [sales@au.cbpg.com](mailto:sales@au.cbpg.com)

For information about the Clyde Bergemann companies and contact details please visit  
<http://www.cbpg.com>